


# MCU-SS

Cam upper plate, steel- self lubricating

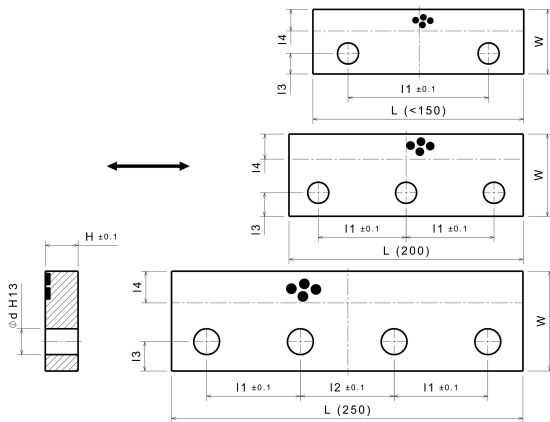

## Product description:

Cam upper plate, steel, self lubricating

## Article properties:

Sliding speed v	15 m/min
Base Material	Steel with solid lubricant
Self-lubricating	Yes
Lubricant	Graphite
Surface Pressure P	30 N/mm <sup>2</sup>
P*v-value	80 N/mm <sup>2</sup> x m/min
Operating temperature	-50°C / +150°C

## Variants:

Articlenumber	Article name	Width W	Length L	Height H	I1	I2	I3	I4	d (DIN EN 20273)	Version
21331001	MCU-SS 52-100-20	52	100	20	50	-	20	13	2xM12	A
21331501	MCU-SS 52-150-20	52	150	20	50	-	20	13	3xM12	B
21332001	MCU-SS 52-200-20	52	200	20	75	-	20	13	3xM12	B
21332501	MCU-SS 52-250-20	52	250	20	75	50	20	13	4xM12	C
21331502	MCU-SS 72-150-30	72	150	30	50	-	25	22	3xM16	B
21332002	MCU-SS 72-200-30	72	200	30	75	-	25	22	3xM16	B
21332502	MCU-SS 72-250-30	72	250	30	75	50	25	22	4xM16	C
21331503	MCU-SS 77-150-35	77	150	35	50	-	25	27	3xM16	B
21332003	MCU-SS 77-200-35	77	200	35	75	-	25	27	3xM16	B
21332503	MCU-SS 77-250-35	77	250	35	75	50	25	27	4xM16	C
21331504	MCU-SS 82-150-40	82	150	40	50	-	25	32	3xM16	B
21332004	MCU-SS 82-200-40	82	200	40	75	-	25	32	3xM16	B
21332504	MCU-SS 82-250-40	82	250	40	75	50	25	32	4xM16	C