


Guide post 05

Słup prowadzący z kołnierzem

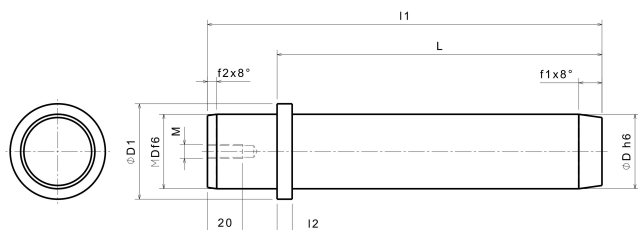

Opis:

Słup prowadzący z kołnierzem

Właściwości:

Materiał bazowy	Stal hartowana
Głębokość utwardzania	1 + 0,5 mm
Twardość	58 ± 2 HRC

Warianty:

Numer przedmiotu	Nazwa produktu	Ø zewnętrzna D	Długość L	D1	I1	I2	f1	f2	M
84518070	05 18-70	18	70	26	90	3,5	8	3	M6
84518080	05 18-80	18	80	26	100	3,5	8	3	M6
84518090	05 18-90	18	90	26	110	3,5	8	3	M6
84518100	05 18-100	18	100	26	120	3,5	8	3	M6
84518110	05 18-110	18	110	26	130	3,5	8	3	M6
84518120	05 18-120	18	120	26	140	3,5	8	3	M6
84518130	05 18-130	18	130	26	150	3,5	8	3	M6
84518140	05 18-140	18	140	26	160	3,5	8	3	M6
84518150	05 18-150	18	150	26	170	3,5	8	3	M6
84518160	05 18-160	18	160	26	180	3,5	8	3	M6
84519070	05 19-70	19	70	26	90	3,5	8	3	M6
84519080	05 19-80	19	80	26	100	3,5	8	3	M6
84519090	05 19-90	19	90	26	110	3,5	8	3	M6
84519100	05 19-100	19	100	26	120	3,5	8	3	M6
84519110	05 19-110	19	110	26	130	3,5	8	3	M6
84519120	05 19-120	19	120	26	140	3,5	8	3	M6
84519130	05 19-130	19	130	26	150	3,5	8	3	M6
84519140	05 19-140	19	140	26	160	3,5	8	3	M6
84519150	05 19-150	19	150	26	170	3,5	8	3	M6
84519160	05 19-160	19	160	26	180	3,5	8	3	M6
84524070	05 24-70	24	70	33	94	5	10	4	M6
84524080	05 24-80	24	80	33	104	5	10	4	M6
84524090	05 24-90	24	90	33	114	5	10	4	M6
84524100	05 24-100	24	100	33	124	5	10	4	M6
84524110	05 24-110	24	110	33	134	5	10	4	M6
84524120	05 24-120	24	120	33	144	5	10	4	M6

Guide post 05

Słup prowadzący z kołnierzem



Numer przedmiotu	Nazwa produktu	Ø zewnętrzna D	Długość L	D1	I1	I2	f1	f2	M
84524130	05 24-130	24	130	33	154	5	10	4	M6
84524140	05 24-140	24	140	33	164	5	10	4	M6
84524150	05 24-150	24	150	33	174	5	10	4	M6
84524160	05 24-160	24	160	33	184	5	10	4	M6
84524170	05 24-170	24	170	33	194	5	10	4	M6
84524180	05 24-180	24	180	33	204	5	10	4	M6
84525070	05 25-70	25	70	33	94	5	10	4	M6
84525080	05 25-80	25	80	33	104	5	10	4	M6
84505090	05 25-90	25	90	33	114	5	10	4	M6
84525100	05 25-100	25	100	33	124	5	10	4	M6
84525110	05 25-110	25	110	33	134	5	10	4	M6
84525120	05 25-120	25	120	33	144	5	10	4	M6
84525130	05 25-130	25	130	33	154	5	10	4	M6
84525140	05 25-140	25	140	33	164	5	10	4	M6
84525150	05 25-150	25	150	33	174	5	10	4	M6
84525160	05 25-160	25	160	33	184	5	10	4	M6
84525170	05 25-170	25	170	33	194	5	10	4	M6
84525180	05 25-180	25	180	33	204	5	10	4	M6
84532090	05 32-90	32	90	41	120	6,5	10	4	M8
84532100	05 32-100	32	100	41	130	6,5	10	4	M8
84532110	05 32-110	32	110	41	140	6,5	10	4	M8
84532120	05 32-120	32	120	41	150	6,5	10	4	M8
84532130	05 32-130	32	130	41	160	6,5	10	4	M8
84532140	05 32-140	32	140	41	170	6,5	10	4	M8
84532150	05 32-150	32	150	41	180	6,5	10	4	M8
84532160	05 32-160	32	160	41	190	6,5	10	4	M8
84532170	05 32-170	32	170	41	200	6,5	10	4	M8
84532180	05 32-180	32	180	41	210	6,5	10	4	M8
84532200	05 32-200	32	200	41	230	6,5	10	4	M8
84532220	05 32-220	32	220	41	250	6,5	10	4	M8
84532240	05 32-240	32	240	41	270	6,5	10	4	M8
84532280	05 32-280	32	280	41	310	6,5	10	4	M8
84540100	05 40-100	40	100	51	137	6,5	12	5	M8
84540110	05 40-110	40	110	51	147	6,5	12	5	M8
84540120	05 40-120	40	120	51	157	6,5	12	5	M8
84540130	05 40-130	40	130	51	167	6,5	12	5	M8
84540140	05 40-140	40	140	51	177	6,5	12	5	M8
84540150	05 40-150	40	150	51	187	6,5	12	5	M8
84540160	05 40-160	40	160	51	197	6,5	12	5	M8
84540170	05 40-170	40	170	51	207	6,5	12	5	M8
84540180	05 40-180	40	180	51	217	6,5	12	5	M8
84540200	05 40-200	40	200	51	237	6,5	12	5	M8
84540220	05 40-220	40	220	51	257	6,5	12	5	M8
84540240	05 40-240	40	240	51	277	6,5	12	5	M8
84540280	05 40-280	40	280	51	317	6,5	12	5	M8
84550110	05 50-110	50	110	64	155	6,5	12	5	M10

Guide post 05

Słup prowadzący z kołnierzem



Numer przedmiotu	Nazwa produktu	Ø zewnętrzna D	Długość L	D1	I1	I2	f1	f2	M
84550120	05 50-120	50	120	64	165	6,5	12	5	M10
84550130	05 50-130	50	130	64	175	6,5	12	5	M10
84550140	05 50-140	50	140	64	185	6,5	12	5	M10
84550150	05 50-150	50	150	64	195	6,5	12	5	M10
84550160	05 50-160	50	160	64	205	6,5	12	5	M10
84550170	05 50-170	50	170	64	215	6,5	12	5	M10
84550180	05 50-180	50	180	64	225	6,5	12	5	M10
84550200	05 50-200	50	200	64	245	6,5	12	5	M10
84550220	05 50-220	50	220	64	265	6,5	12	5	M10
84550240	05 50-240	50	240	64	285	6,5	12	5	M10
84550280	05 50-280	50	280	64	325	6,5	12	5	M10
84550320	05 50-320	50	320	64	365	6,5	12	5	M10
84550380	05 50-360	50	360	64	405	6,5	12	5	M10
84550400	05 50-400	50	400	64	445	6,5	12	5	M10
84563120	05 63-120	63	120	76	169	6,5	12	5	M12
84563140	05 63-140	63	140	76	189	6,5	12	5	M12
84563160	05 63-160	63	160	76	209	6,5	12	5	M12
84563180	05 63-180	63	180	76	229	6,5	12	5	M12
84563200	05 63-200	63	200	76	249	6,5	12	5	M12
84563220	05 63-220	63	220	76	269	6,5	12	5	M12
84563240	05 63-240	63	240	76	289	6,5	12	5	M12
84563280	05 63-280	63	280	76	329	6,5	12	5	M12
84563320	05 63-320	63	320	76	369	6,5	12	5	M12
84563360	05 63-360	63	360	76	409	6,5	12	5	M12
84563400	05 63-400	63	400	76	449	6,5	12	5	M12
84580120	05 80-120	80	120	93	180	6,5	12	5	M12
84580140	05 80-140	80	140	93	200	6,5	12	5	M12
84580160	05 80-160	80	160	93	220	6,5	12	5	M12
84580180	05 80-180	80	180	93	240	6,5	12	5	M12
84580200	05 80-200	80	200	93	260	6,5	12	5	M12
84580220	05 80-220	80	220	93	280	6,5	12	5	M12
84580240	05 80-240	80	240	93	300	6,5	12	5	M12
84580280	05 80-280	80	280	93	340	6,5	12	5	M12
84580320	05 80-320	80	320	93	380	6,5	12	5	M12
84580360	05 80-360	80	360	93	420	6,5	12	5	M12